



CAT 5e UTP SOLID CABLE 24 AWG WITH FR-PVC JACKET

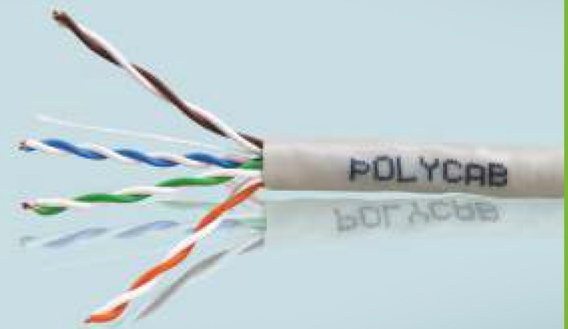

ELECTRICAL PROPERTIES

- Conductor Resistance: 9.2 Ω /100 Mtr max
- Mutual Capacitance: 5.6 nF for 100 Mtr
- Resistance Unbalance (%): max 5
- Capacitance Unbalance: 330 pF for 100 Mtr
- Delay Skew: 48 ns/100 Mtr
- Propagation Delay: < 536 ns/100 Mtr
- NVP: 69%
- Current Rating: max 1.5 A
- Operating Voltage: 72 V
- Dielectric strength: 1000 V RMS

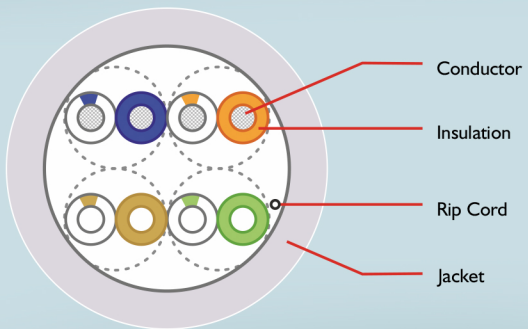